


S-2430C

Bi-color SMD Studio Panel LED light

SWIT

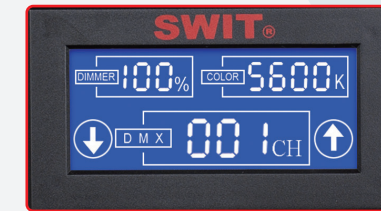

LCD screen display

The rear LCD screen can display the current dimmer percentage, color temperature value, and supports touch control to set DMX address.

■ Features:

- ◆ 1152pcs ultra bright long-life LEDs
- ◆ Surface mounted LED technology
- ◆ 70° wide beam angle with diffuser
- ◆ 3200K-5600K continuously adjustable
- ◆ 100W power, 2500Lux @ 1meter
- ◆ 10%-100% flick-free dimming
- ◆ Super high CRI Ra 93, TLCI 97
- ◆ DMX512 controlled color and dimmer
- ◆ LCD display color and dimmer value
- ◆ Power by V-mount battery or AC-DC adaptor
- ◆ 4-leaf metal barn doors
- ◆ Strong all-metal housing
- ◆ U-shape support and lighting tripod mount

■ Specifications:

LED	1152pcs SMD LEDs
Illuminance	2500Lux @ 1m
Beam angle	70°
Color Temperature	5600K±300K ~ 3200K±200K
CRI	93
TLCI	97
Power	100W
Working voltage	DC12V — 17V
Dimension	630 x 440 x 83mm
Lighting area	477 x 237mm
Weight	5.8kg